


UC400 Cat.6 U/UTP SD PVC E_{ca}

U/UTP Installation cable

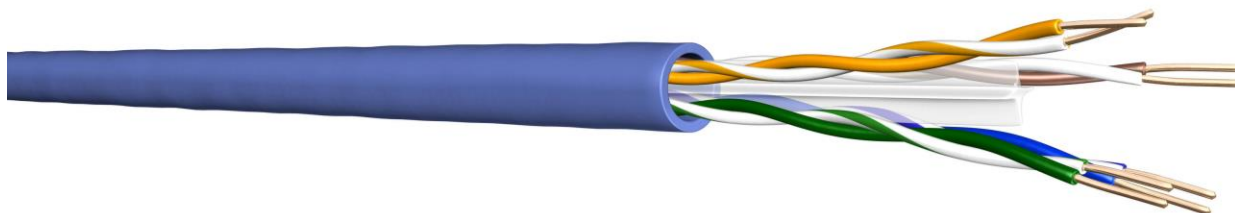

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
IEEE 802.5 16 MB; ISDN; TPDDI; ATM
Power over Ethernet (PoE) / Type 1-4

Standards

EIA/TIA 568.2-D
ISO/IEC 11801 2nd ed; IEC 61156-5;
EN 50173-1, EN 50288-6-1
IEEE 802.3af / at / bt

Flame resistance

EN 50399: Class E_{ca}
PVC: IEC 60332-1

Construction

Conductor	Bare copper AWG24
Insulation	Polyethylene, Ø 0.95 mm nom
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non-metallic cross separator (spline)
Sheath	PVC blue RAL 5012

Mechanical properties

Minimum bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	during operation	-20°C up to + 60°C
	during installation	0°C up to + 50°C

UC400 Cat.6 U/UTP SD PVC E_{ca}

Electrical properties

at 20°C

DC loop resistance	188 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Mean impedance 100 MHz	100 ± 5 Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 518 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min) Core/Core	1000 V
Coupling attenuation	40dB

Electrical data (nominal)

acc. to Cat.6 (at 20°C)

f (MHz)	Attenuation (dB/100m)		NEXT (dB)		PS-NEXT (dB)		ACR (dB/100m)		PS-ACR (dB/100m)		ELFEXT (dB/100m)		PS-ELFEXT (dB/100m)		Return loss (dB)	
	max.	Nom.	min	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	min.	Nom.
1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80	20	22
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23	25
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25	27
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25	27
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25	27
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6	26
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5	24
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1	23
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5	22
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8	21
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4	21
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0	20
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3	19
300		36.1		41		38		4.8		1.8		32		30		19
400		41.7		39		36		-2.7		-5.7		30		28		18

UC400 Cat.6 U/UTP SD PVC E_{ca}

Technical data

Product Reference Code	Product name	Outer diameter mm	Euro Class	Fire load		Weight kg/km	Copper index	Tensile force N
				MJ/km	kWh/m			
60109855	UC400 C6 U/UTP SD PVC BU 305BR	5.2	E _{ca}	348	0.096	35	18.0	80
60109813	UC400 C6 U/UTP SD PVC BU 500DW							
60109854	UC400 C6 U/UTP SD PVC BU 1000DW							