

# HWg-SMS-GW

SMS Gateway for text messaging from other HW group products

HWg-SMS-GW is a LAN gateway for sending alarm SMS from HW group products. Alarm messages can be sent from all HW group products.

No software needed, works over the LAN at the Box-2-Box (Peer-to-Peer) level.


Save administration costs and effort – use only a single SIM for all your devices.

Each device can send its alarm SMS to a different number.

HWg-SMS-GW is also used to send text messages from HW group software applications (HWg-Trigger, HWg-DCD) and the SensDesk.com online service.

## Applications

- Send SMS from your SensDesk.com account.
- Send SMS from your Poseidon2, HWg-PWR 3/12/25 and other IP sensors in your LAN.
- HWg-Trigger notifies by SMS to a failure of any device in your network.
- HWg-DCD sends a text message upon unauthorized access to your rack.
- Nagios can send its alerts via SMS.

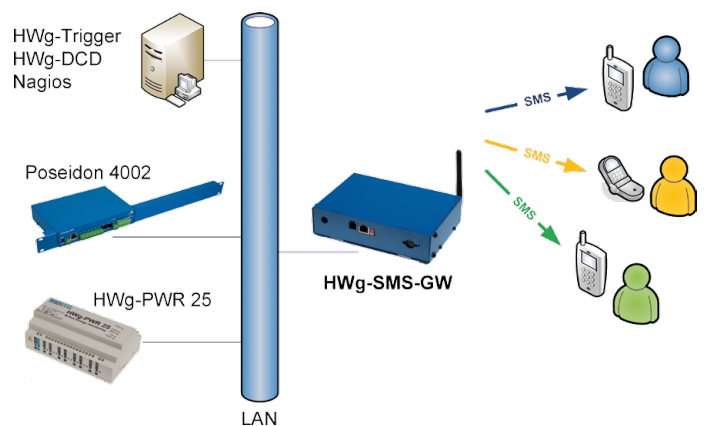


- ✓ Only one SIM Card is sufficient for all HW group products.
- ✓ No text messaging software is necessary.
- ✓ Can be used as a SMS gateway for HWg-Trigger, HWg-DCD, Nagios and other software
- ✓ SMS gateway for your account at the SensDesk.com online portal.

## Features

- No software needed to send SMS. The Box-2-Box mode works as a Peer-to-Peer over LAN.
- Compatible devices:  
HWg-PWR 3/12/25, HWg-WLD, Poseidon2, Poseidon 2250, Poseidon 4002
- Compatible software:  
HWg-DCD, HWg-Trigger, Nagios
- Compatible services:  
SensDesk.com
- Web-based configuration.
- Message recipient (phone number) is set in the connected device (or in software). Hence a single HWg-SMS-GW can send messages to dozens of different recipients
- External antenna simplifies usage in a data center.
- Quad-Band GSM modem works with any GSM network in the world.
- Examples of product usage for programmers available in HWg-SDK (Borland C++, MS Visual C, VB, C#, PHP, JAVA etc.)

## HWg-SMS-GW

<b>Ethernet</b>	10 Mbit/s
<b>IP protocols</b>	ARP, TCP/IP (HTTP, netGSM)
<b>GSM</b>	Quad-Band 850 / 900 / 1800 / 1900 MHz
<b>Antenna</b>	External, SMA Quad-Band, 3m
<b>SMS memory</b>	20 messages
<b>Mount</b>	Desktop / 19" Rack
<b>Power</b>	9-15V / 0,4 A
<b>Dimensions</b>	105 x 105 x 25 [mm]
<b>Environment</b>	-10°C až +65°C +14°F až +149°F

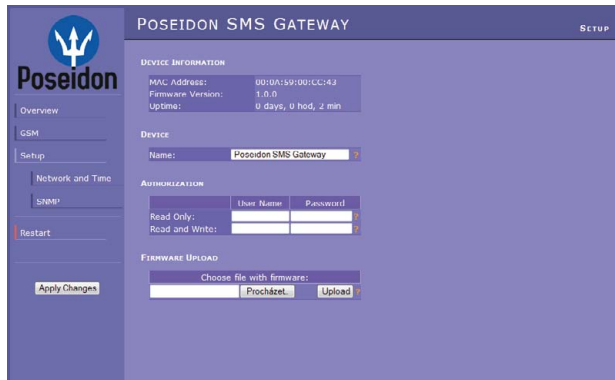

## Accessories & related products:




HWg-SMS-GW



HWg-PWR 25



Poseidon 2250

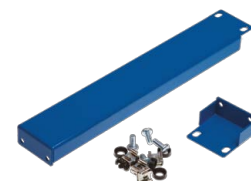

L profile 19" size

### HWg-SMS-GW

Standard product package, contains an external antenna with 3m cable and a power adapter

### L profile 19" size

Bracket for installation into a 19" rack/cabinet